



Module I Case CBSTC5845



20 kWh
ECR

Proven Safety for Battery Storage and Shipping


The premier solution for preventing and containing hazardous battery fires. The CellBlock 5845 Module I Case is capable of accommodating large-format batteries and offers extreme protection against lithium-ion thermal events with 360° fire suppression coverage for all of its contents.

A double-walled system is paired with CellBlock’s proprietary fire panels for exceptional thermal protection. The pressure relief system mitigates smoke and fumes and eliminates risk of explosion due to overpressurization.


- ✓ Patented FCP Technology
- ✓ CellBlockEX® Deployment
- ✓ Gas Mitigation
- ✓ Heavy-duty stabilizing locking feet and fork lift glides
- ✓ Optional Battery Support Tray
- ✓ Thermal and ballistic protection
- ✓ Safe and compliant transportation of batteries, including damaged, defective, and prototype.
- ✓ UN rated and Special Permit 20549 and 21442 authorized
- ✓ P911/LP906 Tested and Certified
- ✓ Optional Fire Suppression Pillows
- ✓ Optional TAS (Thermal Alert System)



Tested beyond compliance. We subject our cases to “worst-case scenario” testing.


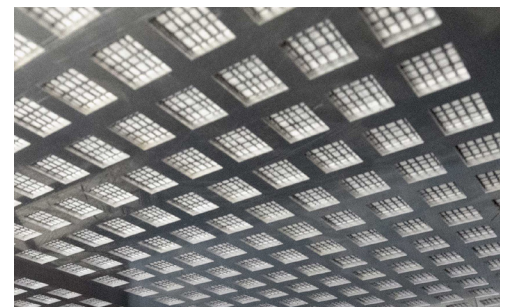


Effective suppression with a self-deployed extinguishing system featuring **CellBlockEX Technology**

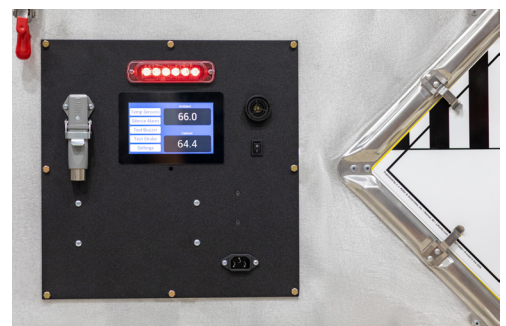

Available with TAS (Thermal Alert System) to provide proactive battery fire detection.

CBSTC5845 SPECIFICATIONS

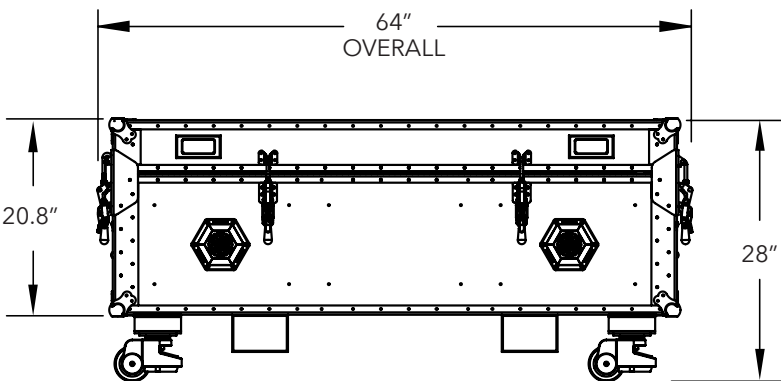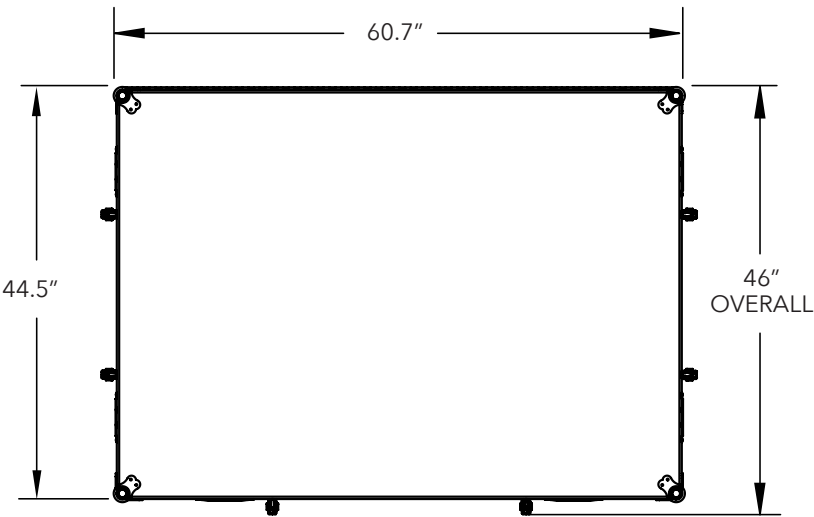

UN Mark	50B/X/S/* **/USA/M6484/0/966 ** year of manufacture
Exterior Dimensions	64" x 46" x 28.3" 162.6cm x 116.8cm x 71.9cm
Interior Dimensions	55.5" x 38.5" x 14.5" 141cm x 97.8cm x 36.8cm
Tare Weight	502 lbs 228 kg
Max. Content Weight	1627 lbs max. 738 kg max.
Gross Weight Limit	2130 lbs max. 966 kg max.

