



Module II Case CBSTC7562



40 kWh
ECR

Proven Safety for Battery Storage and Shipping


The premier solution for preventing and containing hazardous battery fires. The CellBlock 7562 Module II Case is capable of accommodating large-format batteries and offers extreme protection against lithium-ion thermal events with 360° fire suppression coverage for all of its contents.

A double-walled system is paired with CellBlock's proprietary fire panels for exceptional thermal protection. The pressure relief system mitigates smoke and fumes and eliminates risk of explosion due to overpressurization.


- ✓ Patented FCP Technology
- ✓ CellBlockEX® Deployment
- ✓ Gas Mitigation
- ✓ Fork lift glides
- ✓ Optional Battery Support Tray
- ✓ Thermal and ballistic protection
- ✓ P911/LP906 Tested and Certified
- ✓ Optional Fire Suppression Pillows
- ✓ Optional TAS (Thermal Alert System)
- ✓ UN Mark Pending



Tested beyond compliance. We subject our cases to "worst-case scenario" testing.


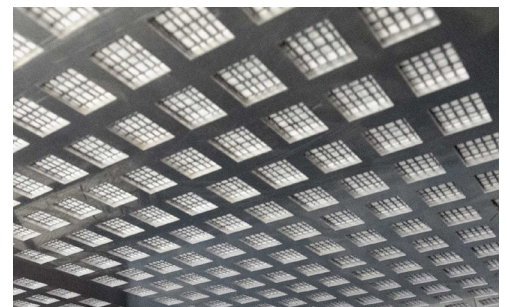


Effective suppression with a self-deployed extinguishing system featuring **CellBlockEX Technology**

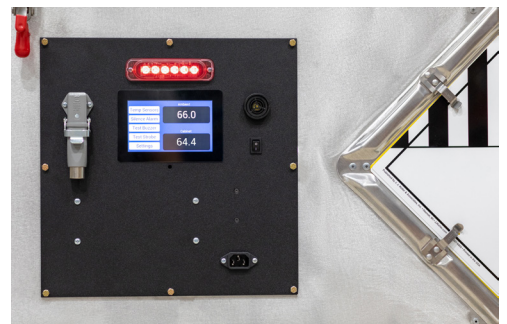

Available with TAS (Thermal Alert System) to provide proactive battery fire detection.

CBSTC7562 SPECIFICATIONS

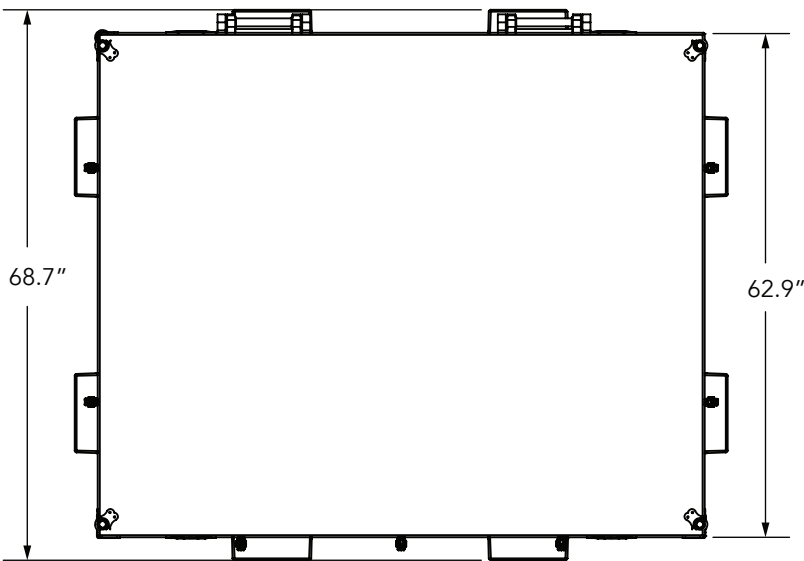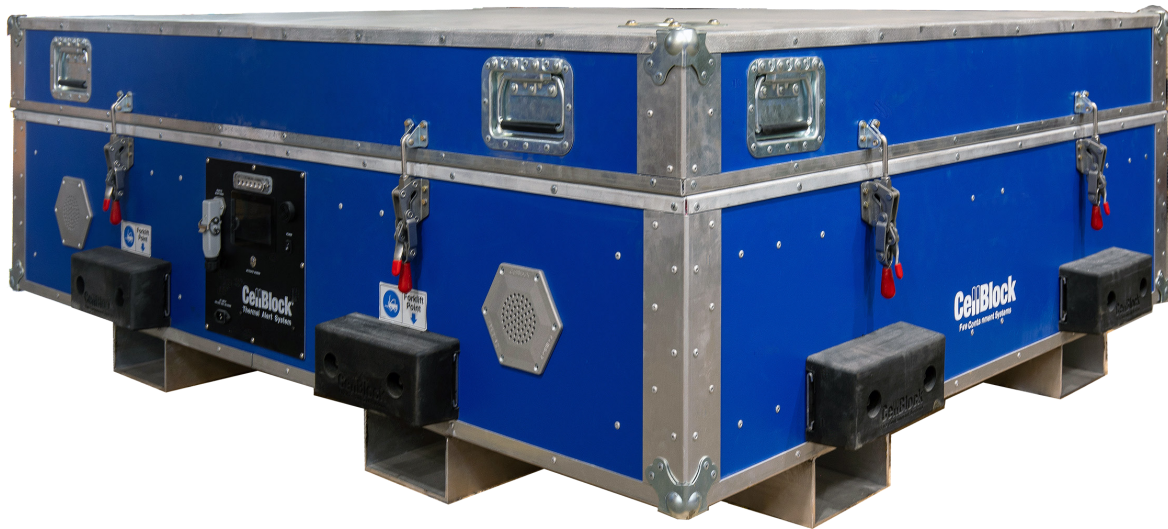

UN Mark	Pending
Exterior Dimensions	75.6" x 68.7" x 27" 192cm x 174.5cm x 68.6cm
Interior Dimensions	70" x 57" x 14" 177.8cm x 144.8cm x 35.6cm
Tare Weight	1034 lbs 469 kg
Max. Content Weight	Pending
Gross Weight Limit	Pending

